

Cell Box 4G LTE

AT&T SIM Card
Included at No Charge
for easy activation.



- Open gates from your phone.
- Built in time clock control.
- Remotely program your keypad codes by app.
- Automatic 7-day timer controlled by the app.
- Activity log (see who opened your gates and when).
- Access your property by telephone, caller ID (known number), SMS, or pin code.
- 15V DC power supply adaptor included.
- Built-in illuminated keypad with 200 codes, 20-time zone codes, 30-temporary codes.
- 100 Registered caller id users.
- Get a call from your cellbox anywhere in the world.
- Two year limited warranty.



CODE: Keypad code used, with date and time!

CID: Caller ID user with last 6 digits of phone number shown!

USER: Home user, opened their gates at this time and date.



Accessories for Low Signal Areas:





- RX489WB- Yagi antenna
- J195SN20- Cable for yagi antenna
- SIGNAL4GKIT: 4G amplified antenna

Cell Box 4G LTE



PHYSICAL MEASUREMENTS

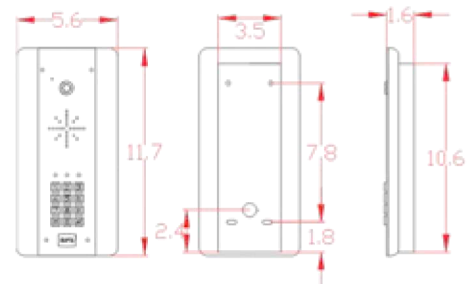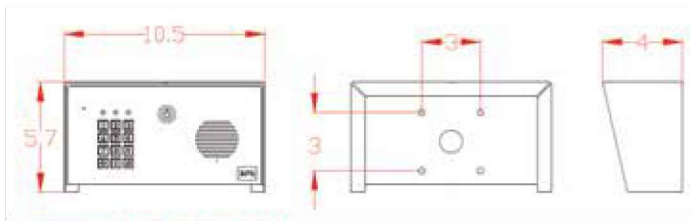

GENERAL:

Voltage: 15v dc
Recommended cable @ 25 feet: 14 gauge
Solar compatible: Yes
Current on standby: Operating 55mA
Current: 330mA
Peak Demand Current: Internal Fuse 2 Amps
Rating: 500mA quick blow

CELLULAR MODULE:

Relays: 2 relays, max 2 amps, 24v ac/dc load
Latching: Yes
Caller ID users: 100
Programming: SMS & APP
Network compatibility: AT&T, T-Mobile

KEYPAD CODES:

Standard codes: 200
Time zoned codes: 20
Temporary codes: 30